


### Extraneous Load Factors

**Equation:**  $\sigma_{max} \geq (A)Fx + (B)Fy + (C)Fz + (D)Mx + (E)My + (F)Mz$

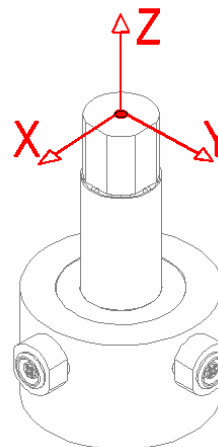

**Material:** 17-4 P.H. Stainless Steel (\*S.S.)

Material	Capacity (lb)	A	B	C	D	E	F
S.S*	50	820	820	24	156	156	1940
	200	300	300	15	85	85	500

$\sigma_{max}$  **Table**

Material	Static Load (=60% Y.S.)	Fatigue (Non Reversing Loads)	Fatigue (Full Reversing Loads)
17-4PH S.S	87,000	78,000	62,000*

\*Value is 75% of Fatigue Strength based on 10-20 x 10<sup>6</sup> cycles and allow for factors that influence Fatigue such as surface finish, stress concentrations, corrosion, temperature and other variables for the production of the transducer, for infinite Fatigue Life (100 x 10<sup>6</sup>) use 75% of values shown.

### Deflection & Natural Frequency

Material	Capacity (lb)	Deflection (in.)	Natural Frequency (Hz)	$\beta$
(S.S*)	50	.0078	800	0.0933
	200	0.011	1300	0.1030

\*FN results are based on calculation of deflection & weight scene on Sensor arm.

**Natural Frequency & Frequency Response Equation's:**

$$\text{Natural Frequency (FN)} = 3.13 \sqrt{\frac{1}{\frac{\beta}{\text{Capacity}} \cdot \text{Deflection}}} \text{ (Hz)}$$

This documentation was generated and completed to the best ability of FUTEK's Engineering Team using FEA Analysis, Empirical data and Multiple Testing Simulations. The information and recommendations on this document are presented in good faith and believed to be correct however, FUTEK Advanced Sensor Technology makes no representations or warranties as to the completeness or accuracy of the information.

$$\text{Frequency Response with load (FR)} = 3.13 \sqrt{\frac{1}{\frac{\beta + \text{AppliedLoad}}{\text{Capacity}} \cdot \text{Deflection}}} \text{ (Hz)}$$

\*Where  $\beta$  values are obtained by Futek Engineers

---

This documentation was generated and completed to the best ability of FUTEK's Engineering Team using FEA Analysis, Empirical data and Multiple Testing Simulations. The information and recommendations on this document are presented in good faith and believed to be correct however, FUTEK Advanced Sensor Technology makes no representations or warranties as to the completeness or accuracy of the information.