

**SPECIFICATIONS****GENERAL**

Item Number	FSH04936
Material	Aluminum Body/Stainless Steel Cover
Weight	0.23 lb [105 g]
IP Rating	IP40

INPUT

Input Type	Strain Gauge (Differential Input from ± 0.2 to ± 500 mV/V) ³
Internal Shunt Value	30, 43.7, 60.4, 87.6, 100, 150, 300, 432 k Ω ($\pm 1\%$)
Nonlinearity	$\pm 0.01\%$ of FSR ¹
Bridge Excitation	5 or 10 VDC (DIP Switch)
Min/Max Bridge Resistance	87.5 to 5000 Ω

OUTPUT

Gain Range	110 to 6300 ²
Output Range	4 - 20, & 12 ± 8 mA
Load Impedance	< 500 Ω
Bandwidth	See Chart ⁴
Noise	See Chart ⁴
Calibration Span/Offset range	$\pm 10\%$ of FSR ¹

POWER

Supply	12.5 to 26 VDC
Inrush Current	1 A (Max)
Power Consumption	1 W (Max)(Instrument Only)
Power Indicator	Green LED

ENVIRONMENT

Operating Temperature	-13° to 158°F (-25° to 70°C)
Storage Temperature	-40° to 185°F (-40° to 85°C)
Temperature Stability/Drift	± 25 ppm of FSR ¹ /°C

CONFORMITY

RoHS	2011/65/EU Compliant
CE	FCC 15.107:2022, FCC 15.109:2022, FCC 15.109(g):2022, ICES-003 Issue 7:2020, VCCI-CISPR 32:2016, EN IEC 61326-1:2021

FEATURES

- Uni-directional/bi-directional output, differential input
- 256 selectable shunt and gain combinations (DIP Switch)
- Digitally controlled remote shunt with externally accessible activation button
- Internal span and offset potentiometers
- Sensor polarity reversal DIP switch
- Zero shift DIP switch (selectable 0 and midpoint)
- Reliable spring loaded DIN clip design
- Removable magnetic cover for instrument setting access and protection
- External chassis connection ([Refer to Guide](#))
- Hot swappable with on-board ESD and over voltage/ current protection

MATERIAL & MANUFACTURING

- High-reliability PCB/assembly (IPC CLASS III)
- High-temperature rated material/BOM items
- Strictly controlled inspection, test, and calibration process
- Fully controlled handling/packaging process
- Extensive test and validation for 100% of production units
- Individual calibration report/certification for instruments and systems

APPLICATIONS

- Medical
- Aerospace
- Precision Industrial Automation
- Lab & Field Instrumentation
- Precision Manufacturing

Sensor Solution Source


Load · Torque · Pressure · Multi-Axis · Calibration · Instruments · Software



U.S. Manufacturer

Model IAA200

DIP SWITCHES CONFIGURATION

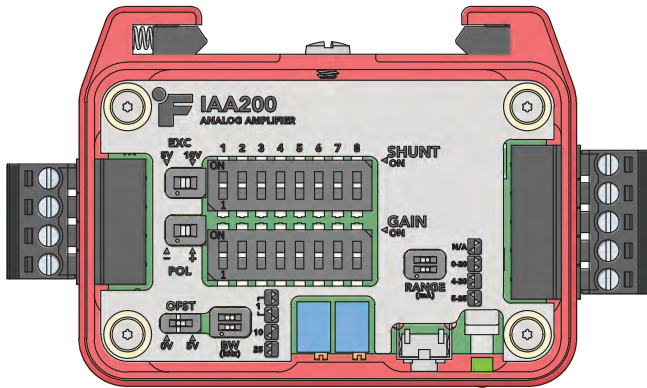


NOISE

Bandwidth kHz	Default Gain μA/p-p
1	15
10	20
25	25

SENSOR SIDE (item #GOD04254)


PIN	WIRING CODE	PIN FUNCTIONALITY
1	+ E	+ Excitation
2	+ S	+ Signal
3	- S	- Signal
4	- E/GND	- Excitation

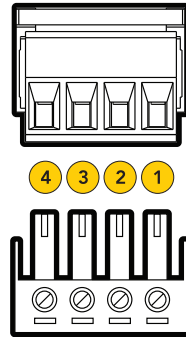

For 6 wire sensors, connect +SENSE to +EXCITATION and -SENSE to -EXCITATION.

POWER/OUTPUT (item #GOD04255)

PIN	WIRING CODE	PIN FUNCTIONALITY	COLOR
1	+VIN	Power Supply	Red
2	GND	Power Ground	Black
3	SHUNT	Remote Connection	Orange
4	GND	Output Ground	Blue
5	IOUT	Output Signal	Green

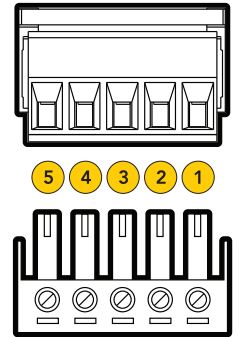

General Notes:


- ¹ FSR = Full Scale Range (Default Settings)
 - ² Gain = 2 If all switches are in OFF position
 - ³ The minimum differential input is determined based on a 10 V excitation and maximum gain to attain the maximum output range
 - ⁴ See "Noise" chart located in page 2 for detailed information
- All Grounds are internally connected
 Use Chassis for systems with cable Shield
 All parameters specified on this drawing have been validated for default settings (0-2 mV/V input at 1 kHz bandwidth with a 10 V excitation for 4-20 mA output) unless otherwise specified.

Sensor Solution Source
 Load · Torque · Pressure · Multi-Axis · Calibration · Instruments · Software



Model IAA200

DIMENSIONS inches [mm]

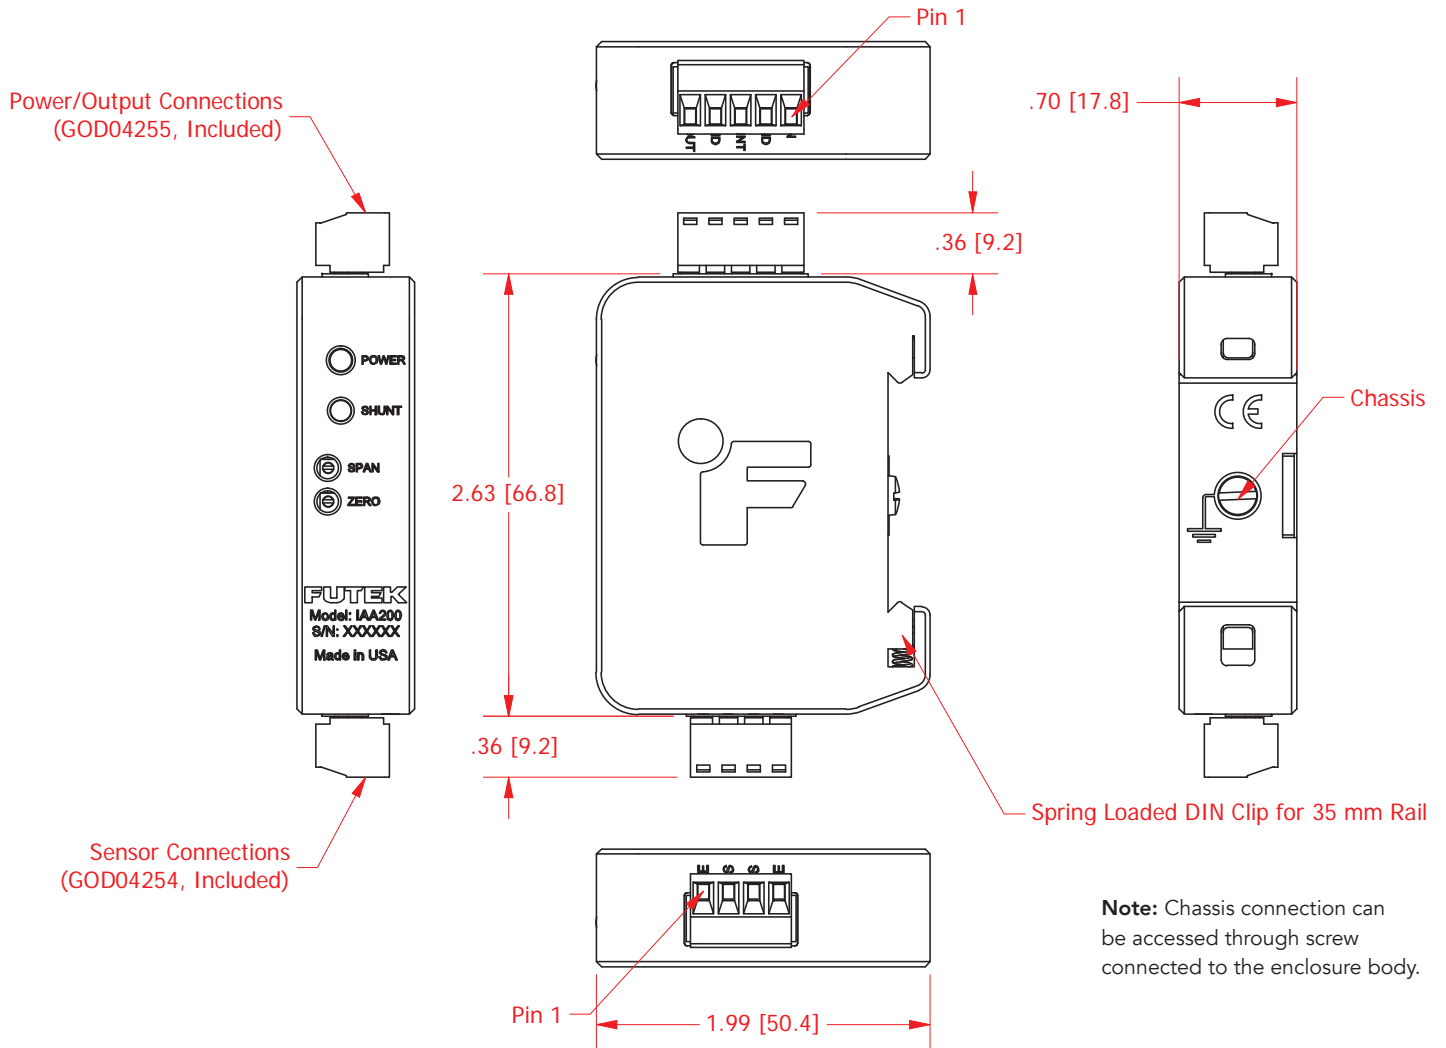

Drawing Number: FI1574-A

FUTEK reserves the right to modify its design and specifications without notice. Please visit <http://www.futek.com/salesterms> for complete terms and conditions.

The information provided herein was developed using FEA analysis, empirical data and multiple testing simulations. FUTEK presents the information in good faith and believes it is correct but makes no representations or warranties as to the completeness or accuracy of the information provided. User's application may produce different data and/or results. By using this information, you agree that you have read and understand this disclosure. Please contact us to discuss your particular application and needs.

