

FUTEK MODEL QLA335

Tension and Compression Overload Protected Load Cell



ITEM NUMBER: SEE CHART

INCH [mm] R.O.= Rated Output

WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
D & H	B & K	E & J	A & F
TEDS Data	TEDS Gnd		
C	G		

ISOLATION DIAPHRAGMS
DO NOT CONTACT OR DAMAGE

-OUTPUT
(TENSION)
+OUTPUT
(COMPRESSION)

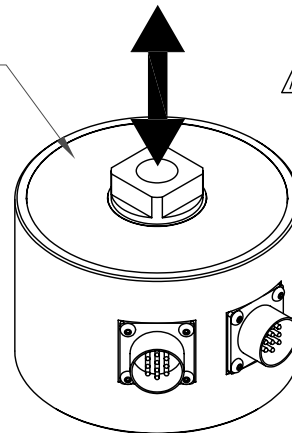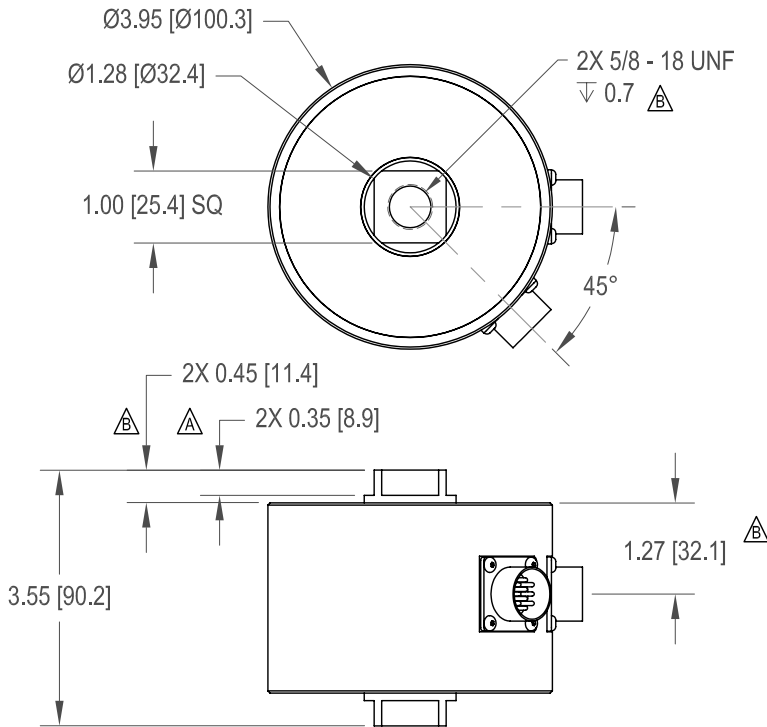

SPECIFICATIONS:

RATED OUTPUT (mV/V)	SEE CHART nom.
CAPACITY	SEE CHART
SAFE OVERLOAD	15,000 lb MAX
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	15 MAX
BRIDGE RESISTANCE	350 Ω nom
NONLINEARITY	±0.2% of R.O.
HYSTERESIS	±0.2% of R.O.
NONREPEATABILITY	±0.05% of R.O.
TEMP. SHIFT ZERO	±0.005% of R.O./°F (0.009% of R.O./°C)
TEMP. SHIFT SPAN	±0.005% of LOAD/°F (0.009% of LOAD/°C)
COMPENSATED TEMP.	60 to 160°F (15 to 71°C)
OPERATING TEMP.	0 to 200°F (-18 to 93°C)
MATERIAL	STAINLESS STEEL
CONNECTOR: 2X PC02E-12-10P	



ITEM #	lb	NEWTON	RATED OUTPUT
QSH01465	250	1112	2
QSH01412	500	2224	2
QSH01466	1000	4448	2
QSH01476	2000	8896	3
QSH01477	3000	13344	3
QSH01478	5000	22240	3
QSH01479	10000	44480	3

DSPM Industries
sensori & trasduttori

Via Paolo Uccello 4 - 20148 Milano
Tel +39 02 48 009 757 Fax +39 02 48 002 070
info@dspmindustria.it www.dspmindustria.it

CUSTOMER APPROVAL-COMPANY

CUSTOMER APPROVAL-NAME /DATE

REVISIONS: (Refer to dwg # revision sheet)

6-30-10
1-14-11
1-28-11

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
±1/2°

CHAMFER:
±5°

TOLERANCE:
.X ±0.1
.XX ±0.01
.XXX ±0.005

3rd ANGLE PROJ.



This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

CAGE: 1X8M6

MODEL: **QLA335**

DWG No.: **FO1269-C**

DRAWN BY: **R. WALKER**

CHECKED BY: **J. MOHBERY**

APPROVED BY: -

DATE: **June 18, 2010**

FUTEK MODEL QLA335



Tension and Compression Overload Protected Load Cell

ITEM NUMBER: SEE CHART

INCH [mm]		R.O.= Rated Output	
WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
D & H	B & K	E & J	A & F
TEDS Data	TEDS Gnd		
C	G		

ISOLATION DIAPHRAGMS
DO NOT CONTACT OR DAMAGE

-OUTPUT
(TENSION)
+OUTPUT
(COMPRESSION)

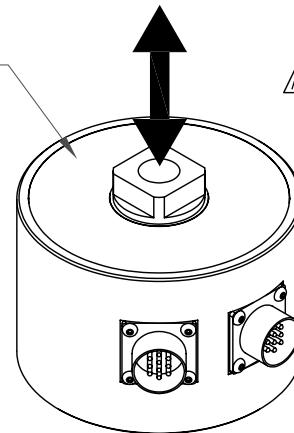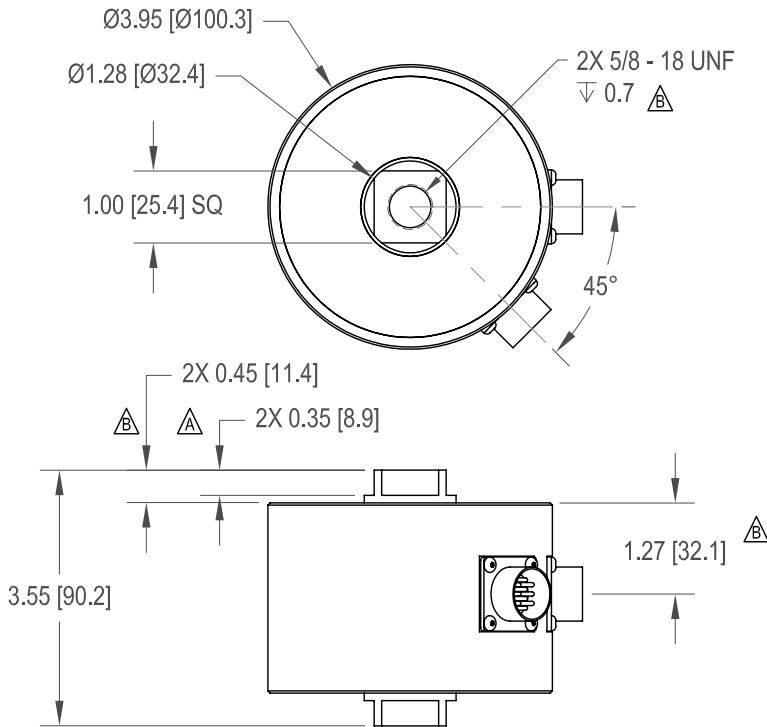

SPECIFICATIONS:

RATED OUTPUT (mV/V)	SEE CHART nom.
CAPACITY	SEE CHART
SAFE OVERLOAD	15,000 lb MAX
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	15 MAX
BRIDGE RESISTANCE	350 Ω nom
NONLINEARITY	±0.2% of R.O.
HYSTERESIS	±0.2% of R.O.
NONREPEATABILITY	±0.05% of R.O.
TEMP. SHIFT ZERO	±0.005% of R.O./°F (0.009% of R.O./°C)
TEMP. SHIFT SPAN	±0.005% of LOAD/°F (0.009% of LOAD/°C)
COMPENSATED TEMP.	60 to 160°F (15 to 71°C)
OPERATING TEMP.	0 to 200°F (-18 to 93°C)
MATERIAL	STAINLESS STEEL
CONNECTOR: 2X PC02E-12-10P	



ITEM #	lb	NEWTON	RATED OUTPUT
QSH01465	250	1112	2
QSH01412	500	2224	2
QSH01466	1000	4448	2
QSH01476	2000	8896	3
QSH01477	3000	13344	3
QSH01478	5000	22240	3
QSH01479	10000	44480	3

DSPM Industria
sensori & trasduttori

Via Paolo Uccello 4 - 20148 Milano
Tel +39 02 48 009 757 Fax +39 02 48 002 070
info@dspmindustria.it www.dspmindustria.it

CUSTOMER APPROVAL-COMPANY

CUSTOMER APPROVAL-NAME /DATE

REVISIONS: (Refer to dwg # revision sheet)

6-30-10
1-14-11
1-28-11

OUTLINE DRAWING


STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
±1/2°

CHAMFER:
±5°

TOLERANCE:
.X ±0.1
.XX ±0.01
.XXX ±0.005



This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

CAGE: 1X8M6

MODEL: **QLA335**

DWG No.: **FO1269-C**

DRAWN BY: **R. WALKER**

CHECKED BY: **J. MOKHERY**

APPROVED BY: -

DATE: **June 18, 2010**

FUTEK MODEL QLA335



Tension and Compression Overload Protected Load Cell

ITEM NUMBER: SEE CHART

INCH [mm]		R.O.= Rated Output	
WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
D & H	B & K	E & J	A & F
TEDS Data	TEDS Gnd		
C	G		

ISOLATION DIAPHRAGMS
DO NOT CONTACT OR DAMAGE

-OUTPUT
(TENSION)
+OUTPUT
(COMPRESSION)

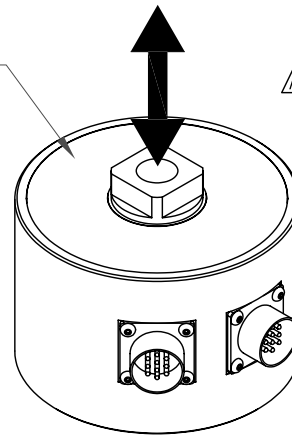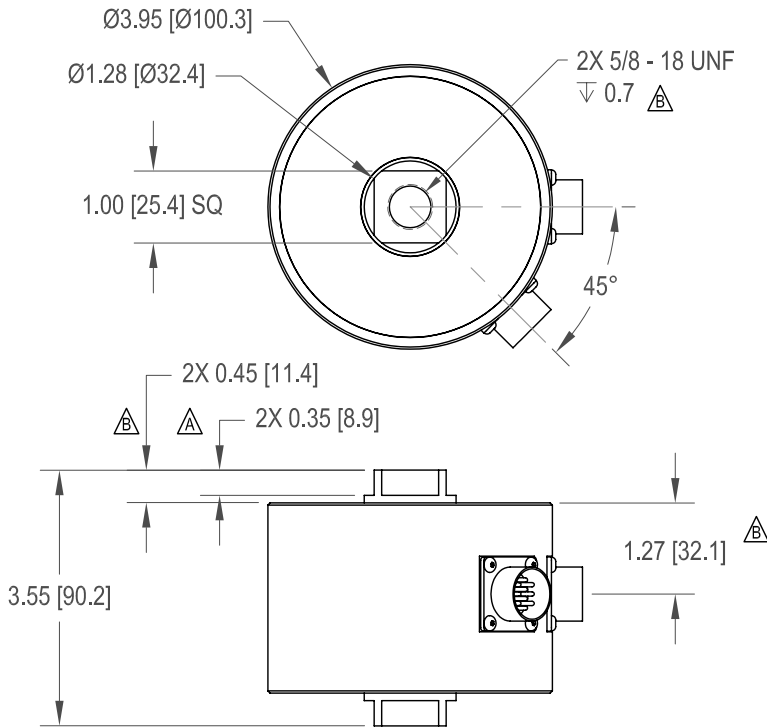

SPECIFICATIONS:

RATED OUTPUT (mV/V)	SEE CHART nom.
CAPACITY	SEE CHART
SAFE OVERLOAD	15,000 lb MAX
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	15 MAX
BRIDGE RESISTANCE	350 Ω nom
NONLINEARITY	±0.2% of R.O.
HYSTERESIS	±0.2% of R.O.
NONREPEATABILITY	±0.05% of R.O.
TEMP. SHIFT ZERO	±0.005% of R.O./°F (0.009% of R.O./°C)
TEMP. SHIFT SPAN	±0.005% of LOAD/°F (0.009% of LOAD/°C)
COMPENSATED TEMP.	60 to 160°F (15 to 71°C)
OPERATING TEMP.	0 to 200°F (-18 to 93°C)
MATERIAL	STAINLESS STEEL
CONNECTOR: 2X PC02E-12-10P	



ITEM #	lb	NEWTON	RATED OUTPUT
QSH01465	250	1112	2
QSH01412	500	2224	2
QSH01466	1000	4448	2
QSH01476	2000	8896	3
QSH01477	3000	13344	3
QSH01478	5000	22240	3
QSH01479	10000	44480	3

DSPM Industria
sensori & trasduttori

Via Paolo Uccello 4 - 20148 Milano
Tel +39 02 48 009 757 Fax +39 02 48 002 070
info@dspmindustria.it www.dspmindustria.it

CUSTOMER APPROVAL-COMPANY

CUSTOMER APPROVAL-NAME /DATE

REVISIONS: (Refer to dwg # revision sheet)

6-30-10
1-14-11
1-28-11

OUTLINE DRAWING


STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
±1/2°

CHAMFER:
±5°

TOLERANCE:
.X ±0.1
.XX ±0.01
.XXX ±0.005



This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

CAGE: 1X8M6

MODEL: **QLA335**

DWG No.: **FO1269-C**

DRAWN BY: **R. WALKER**

CHECKED BY: **J. MOHBERY**

APPROVED BY: -

DATE: **June 18, 2010**