

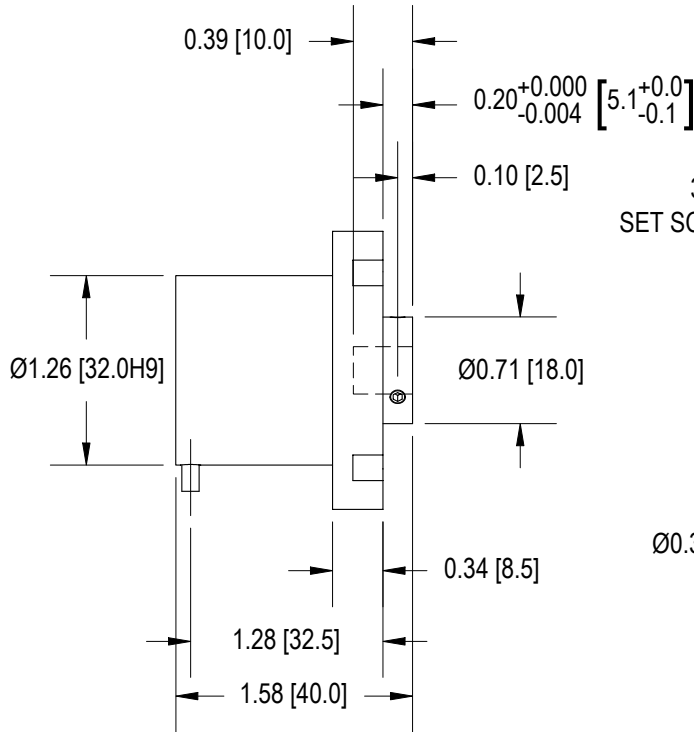


FUTEK MODEL QLA132 Custom Wire Tension Load Cell

INCH (mm)		R.O.= Rated Output	
WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE

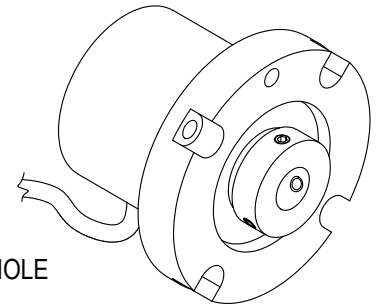


3X M3
SET SCREW

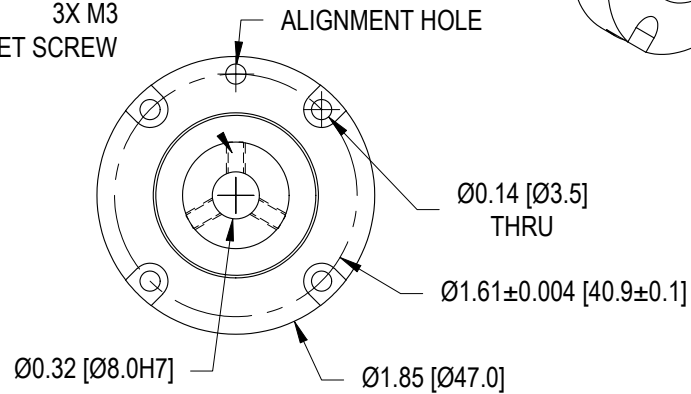

SPECIFICATIONS:

RATED OUTPUT	1 mV/V nom.
CAPACITY	1/2 lb (2.5 N), 5 lb (20 N), 11 LB (100 N)
SAFE OVERLOAD	500% of R.O.
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	18 MAX
BRIDGE RESISTANCE	1000Ω nom
NONLINEARITY	±0.3% of R.O.
HYSTERESIS	±0.3% of R.O.
NONREPEATABILITY	±0.3% of R.O.
TEMP. SHIFT ZERO	△ ±0.005% of R.O./°F (0.01% of R.O./°C)
TEMP. SHIFT SPAN	±0.02% of LOAD/°F (0.036% of LOAD/°C)
COMPENSATED TEMP.	60 to 160°F (16 to 71°C)
OPERATING TEMP.	32 to 140°F (0 to 50°C)
MATERIAL	ALUMINUM
CABLE: 28 AWG, 4 Conductor Braided Shielded PVC Cable, 12 in [305] Long	

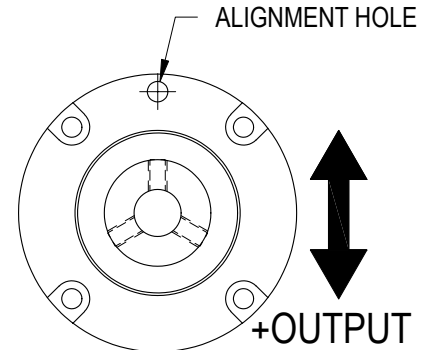

NEWTON	Fn
2.5	300 Hz
20	1K Hz
100	1.6K Hz

DSPM Industria*
sensori & trasduttori

Tel +39 02 48 009 757 Fax +39 02 48 002 070

Via Paolo Uccello 4 - 20148 Milano
info@dspmindustria.it www.dspmindustria.it

MATERIAL:

—

HEAT TREATMENT - FINISH:

—

REVISIONS: (Refer to dwg # revision sheet)

△ 5-27-04

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

- ALL DIMENSIONS ARE IN INCHES
- DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
- REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
- THREADS PER HANDBOOK H-28
- DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
±1/2°

CHAMFER:
±5°

TOLERANCE:
.XX ±.01
.XXX ±.005

3rd ANGLE PROJ.



This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

CAGE: 1X8M6

MODEL: **QLA132**

DRAWN BY: R. WALKER

APPROVED BY: J. MOKHBERY

DWG No.: **FO1007**

CHECKED BY: XXXXX

DATE: **July 23, 2003**