

Single-axial IEPE accelerometer



Features

- High resolution signal
- Adhesive or stud mounting
- Hermetic seal
- Annular shear mode
- Wide temperature range
- Wide frequency response

Application

- Vibration monitoring
- Shock testing
- Road testing
- Modal analysis
- Aircraft testing

Dynamic

PARAMETERS	VALUE	UNITS
Sensitivity, $\pm 10\%$, 25°C	1000	mV/g
Acceleration range	5	g peak
Amplitude nonlinearity	1	%
Frequency response (+/-5%):	1-4,000	Hz
Frequency response (+/- 1dB):	0.3-8,000	Hz
Frequency response (+/- 3dB):	0.3-12,000	Hz
Resonance frequency	25	kHz
Transverse sensitivity, max	5	% Of axial
Temperature response: -50°C	-10	%
Temperature response: +120°C	+10	%

Electrical

PARAMETERS	VALUE	UNITS
Power requirement:	voltage source	18 - 30
	current regulating diode	2 - 10
Electrical noise, Broadband Spectral(g):1Hz to 10kHz	100	μg
Output impedance, max	100	Ω
Bias output voltage(typical)	10	VDC
Grounding	Case grounded	/

Environmental


PARAMETERS	VALUE	UNITS
Temperature range.	-50 to 120	°C
Shock limit	5,000	g peak
Electromagnetic sensitivity equiv g,max	70	$\mu\text{g/gauss}$
Sealing	Hermetic	/
Base strain sensitivity, max	0.0002	g/ μstrain

Physical

PARAMETERS	VALUE	UNITS
Sensing element design	PZT ceramic/shear	/
Weight	25	grams
Case material	SST	/
Output connector	10-32	/

Accessories

PARAMETERS	VALUE	UNITS
Mounting stud: 10-32 to M5(-B), 10-32 to 10-32(-A), or custom(-C)	/	/
Calibration certificate	/	/
Note: Frequency response limits spectral and noise values are typical		
Optional mating cable: 11-L with 10-32 to BNC connector	/	/

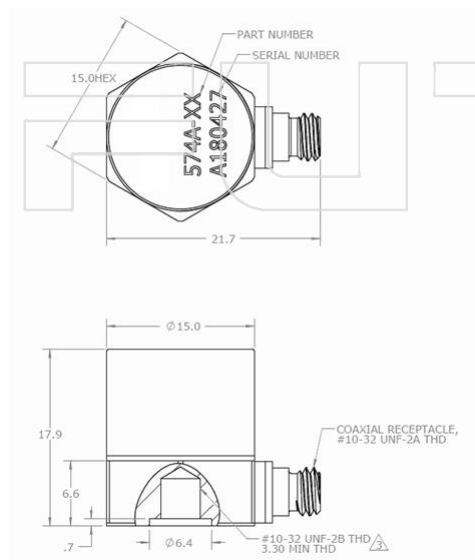

FUTURE reserves the right to make changes to any products or technology herein to improve reliability, function or design. FUTURE does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

Single-axial IEPE accelerometer



Features

- High resolution signal
- Adhesive or stud mounting
- Hermetic seal
- Annular shear mode
- Wide temperature range
- Wide frequency response

Application

- Vibration monitoring
- Shock testing
- Road testing
- Modal analysis
- Aircraft testing

Dynamic

PARAMETERS	VALUE	UNITS
Sensitivity, $\pm 10\%$, 25°C	500	mV/g
Acceleration range	10	g peak
Amplitude nonlinearity	1	%
Frequency response (+/-5%):	1-4,000	Hz
Frequency response (+/-1dB):	0.5-8,000	Hz
Frequency response (+/-3dB):	0.2-12,000	Hz
Resonance frequency	25	kHz
Transverse sensitivity, max	5	% Of axial
Temperature response: -50°C	-10	%
Temperature response: +120°C	+10	%

Electrical

PARAMETERS	VALUE	UNITS
Power requirement:	voltage source	18 - 30
	current regulating diode	2 - 10
Electrical noise, Broadband Spectral(g):1Hz to 10kHz	100	μg
Output impedance, max	100	Ω
Bias output voltage(typical)	10	VDC
Grounding	Case grounded	/

Environmental


PARAMETERS	VALUE	UNITS
Temperature range.	-50 to 120	°C
Vibration limit	500	g peak
Shock limit	5,000	g peak
Electromagnetic sensitivity equiv g,max	70	$\mu\text{g/gauss}$
Sealing	Hermetic	/
Base strain sensitivity, max	0.0002	$\text{g}/\mu\text{strain}$

Physical

PARAMETERS	VALUE	UNITS
Sensing element design	PZT ceramic/shear	/
Weight	25	grams
Case material	SST	/
Output connector	10-32	/

Accessories

PARAMETERS	VALUE	UNITS
Mounting stud: 10-32 to M5(-B), 10-32 to 10-32(-A), or custom(-C)	/	/
Calibration certificate	/	/
Note: Frequency response limits spectral and noise values are typical		
Optional mating cable: 11-L with 10-32 to BNC connector	/	/

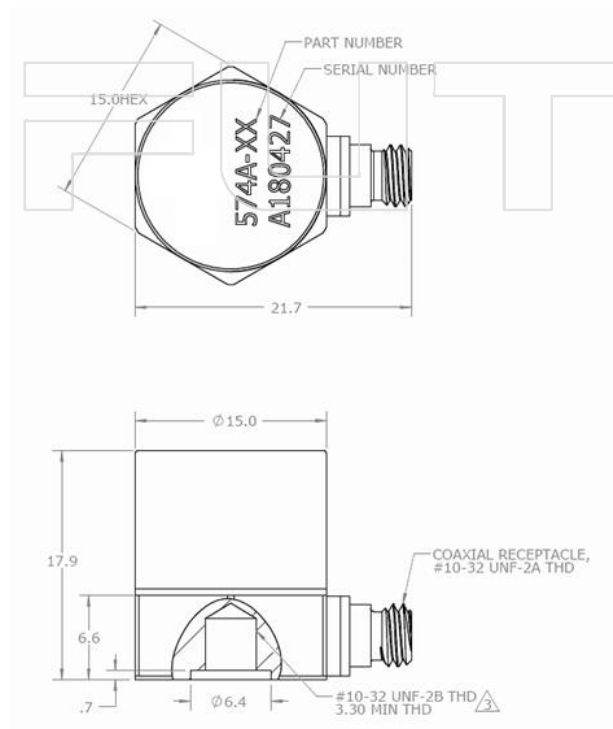

FUTURE reserves the right to make changes to any products or technology herein to improve reliability, function or design. FUTURE does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.