


# JA-40GA Accelerometer

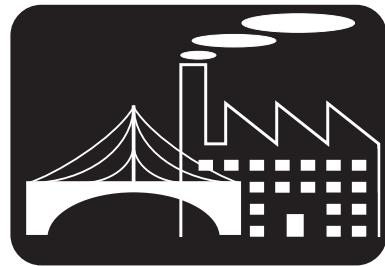

## Key features

- Ultra-low noise
- Excellent thermal stability
- Low frequency operation
- -20 °C to +70 °C operating temperature
- Easy to install

## Applications

- Structural health monitoring
- Sway and tilt analysis
- Industrial vibration control
- Seismology

The JA-40GA is a high performance servo balanced quartz accelerometer which has been developed for measuring very low levels of vibration. The signal processing circuit has been optimized to provide very low output noise while maintaining excellent Scale factor and Bias stability over the whole operating temperature range.


The JA-40GA accelerometer is therefore ideal for use in structural health monitoring, active vibration control systems and earthquake observation where the slightest tremors are can be indicative of catastrophe.

*To be exported in accordance with all relevant regulations.*

## Dimensional drawings

### JA-40GA

Unit: mm

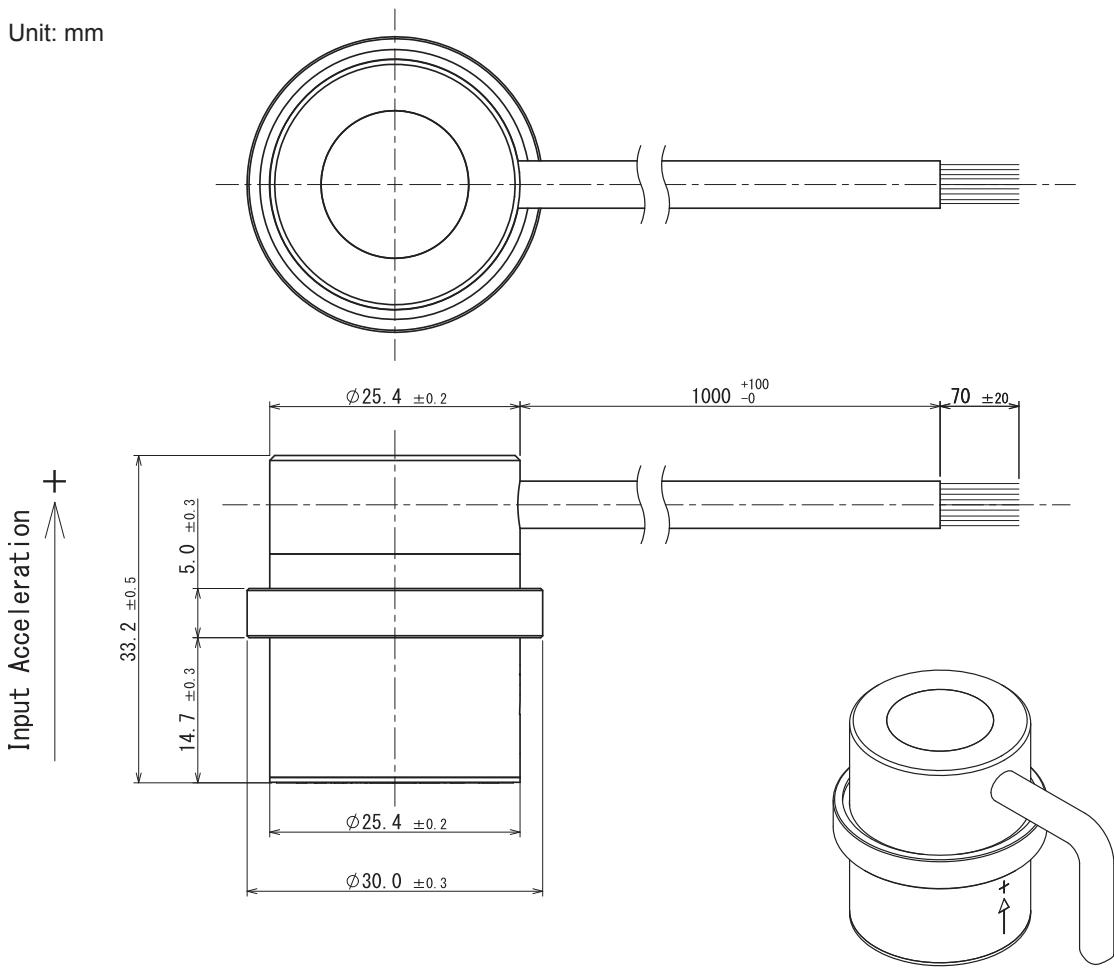


### Wire assignment

Cable Colour	Notes
Yellow	Signal Output
White	Signal Return
Gray	Self Test Current (Hi)
Green	Self Test Current (Lo)
Red	+15 V <sub>DC</sub> Power
Blue	-15 V <sub>DC</sub> Power
Black	Power Return

### Label

xx	Measurement range
02	±2 G min.
04	±4 G min.
08	±8 G min.

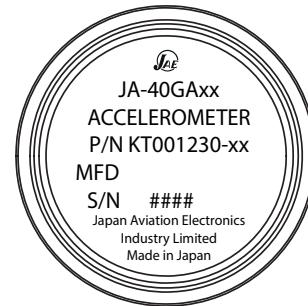



## Technical data

Environmental			
Temperature	Operating		-20 °C to +70 °C
	Non-operating		-40 °C to +85 °C
Vibration	Sine		3.10 mm 0-peak, 20 Hz - 40 Hz 20 G 0-peak, 40 Hz - 2,000 Hz
	Random		10 Grms, 20 Hz - 2,000 Hz
Shock	Operating/Non-operating		100 G
Electrical			
Input voltage		$\pm 14.5 \text{ V}_{\text{DC}}$ to $\pm 15.5 \text{ V}_{\text{DC}}$	
Input current (quiescent)		10 mA max.	
Mechanical			
Weight		115 grams max.	
Performance		JA-40GA02	JA-40GA04
Measurement range		$\pm 2 \text{ G}$ min.	$\pm 4 \text{ G}$ min.
Scale factor	Nominal (@ 20 °C)	5.000 V/G $\pm 5 \text{ \%}$	2.000 V/G $\pm 3 \text{ \%}$
	Temperature coefficient	$\pm 400 \text{ ppm}/^{\circ}\text{C}$ max.	$\pm 400 \text{ ppm}/^{\circ}\text{C}$ max.
Bias	Nominal (@ 20 °C)	$\pm 10 \text{ mG}$ max.	
	Temperature coefficient	$\pm 100 \mu\text{G}/^{\circ}\text{C}$ max.	
Case alignment	Nominal (@ 20 °C)	$\pm 3.0 \text{ mrad}$	
Noise	1 Hz to 30 Hz	$0.1 \times 10^{-6} \text{ G}/\sqrt{\text{Hz}}$ max.	
Linearity		$\pm 0.05 \text{ \%}$ full scale max.	
Frequency response (bandwidth)		200 Hz max.	


1 G = 9.80665 m/s<sup>2</sup>

## Mounting block (Option)


■ 3 Axis Block

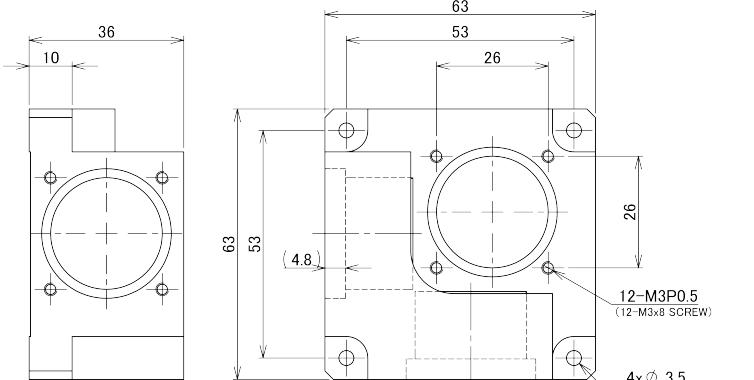

■ 1 Axis Block

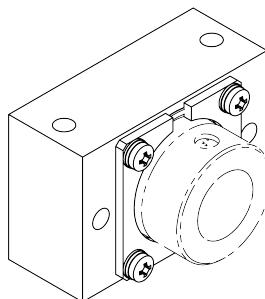


Unit: mm

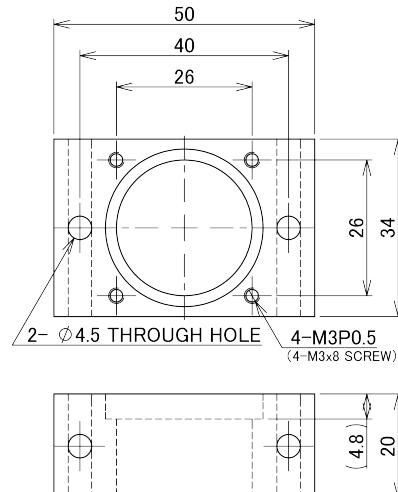

## More accelerometers from JAE




Industrial  
Vibration  
Control

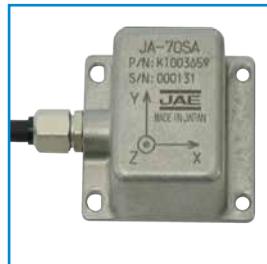

Structural  
Health  
Monitoring



Oil and Gas  
Exploration



Civil  
Aviation

## Document revision table

Document number	Issue	Revision date	Changes
VCL001-000016	01	01/07/2021	New document

JAE reserves the right to modify specifications without prior notice.

© 2021 Japan Aviation Electronics Industry, Ltd.

VCL001-000016\_Issue 01, 01/07/2021