




MEDIUM RESOLUTION ACCELEROMETER (4-20 mA)

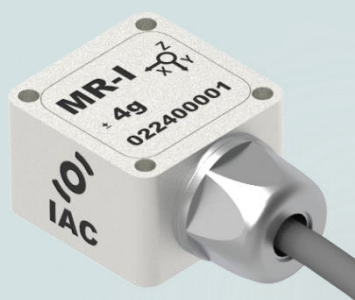


PROPERTIES

- 3 axes
- Suited for direct connection to standard control and measurement equipment
- Embedded 4..20mA signal conditioning
- Galvanically Isolated
- Protected against false polarization
- Compact and rugged design
- Protection grade IP67


BLOCK DIAGRAM

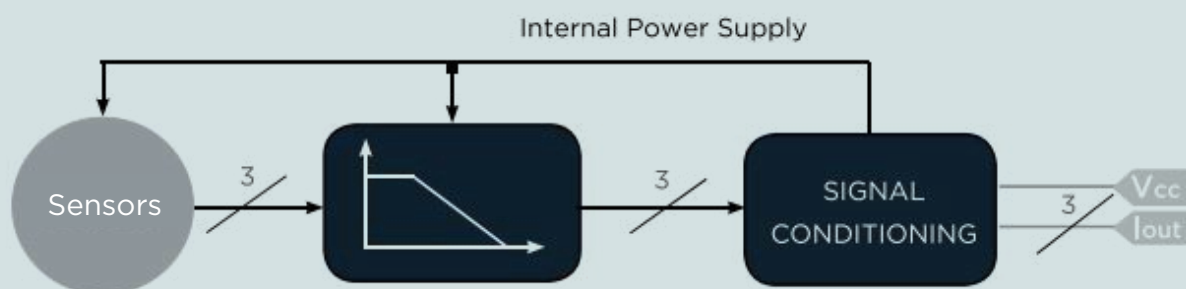

DIMENSIONS - Cable Gland Model

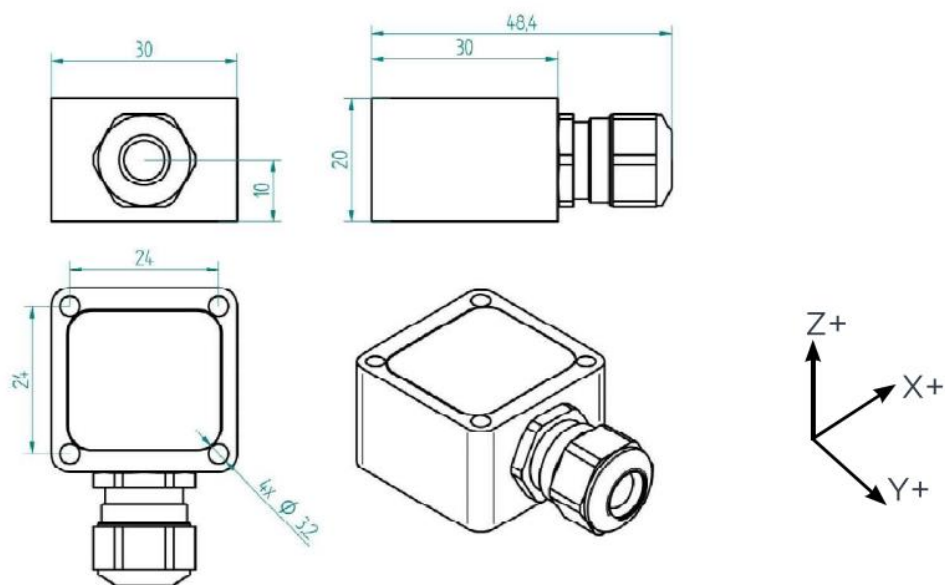

DIMENSIONS - M12 Connector Model

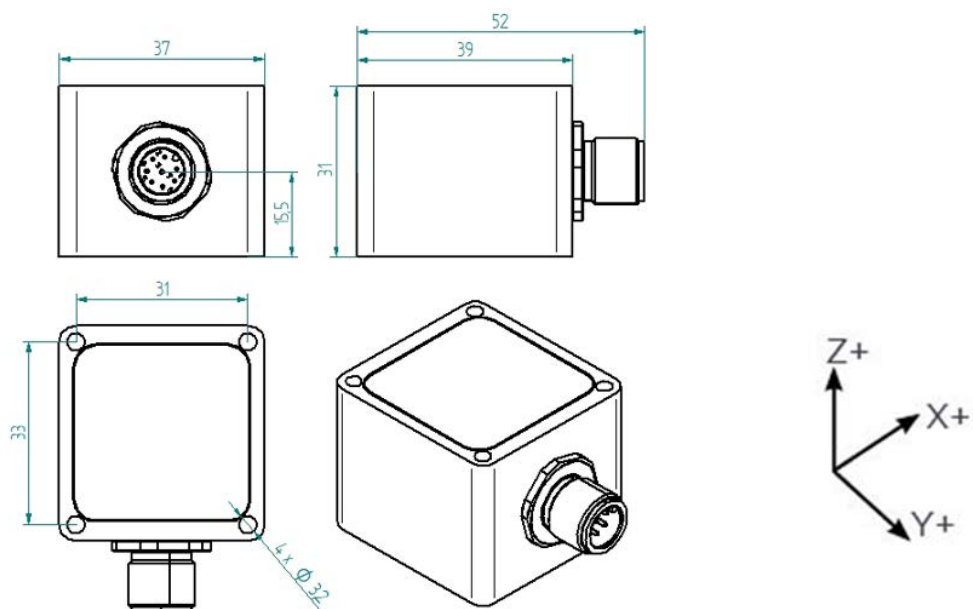

MOUNTING ACCESSORIES

See " IAC - Accelerometer Accessories data sheet "

SPECIFICATIONS - All Models

OUTPUT/CHANNEL	Output Range	4-20mA
	Supply Voltage	12-30 VDC
	Measuring Range	± 2g or ± 4g or ± 8g
	Sensitivity	3.53mA/g (±2g), 1.76mA/g (±4g), 0.88mA/g (±8g)
	Lower frequency limit	0 Hz (DC)
	Upper 3 dB frequency limit	100, 250, 500 or 1000 Hz (1st and 2nd order)
	Non-linearity	± 0.5 % F.S. (±2g, ±4g), ± 1.2 % F.S. (±8g)
	Residual noise (Typical)	24 µg/√Hz (±2g), 27 µg/√Hz (±4g), 30 µg/√Hz (±8g)
	Transverse Sensitivity	< 5%
	Destruction limit	± 5000g
ENVIRONMENTAL CHARACTERISTICS	Temperature Range	Operating -40 to 85°C / -40 to 185°F
	Temperature coefficient of sensitivity	± 0.02 % /°C
	Temperature drift of zero point	± 0.1 mg/°C (±2g, ±4g), ± 0.15 mg/°C (±8g)
	Protection grade	IP67
MECHANICAL DATA	Resonance frequency	2.4kHz
	Case Material	Stainless Steel or Aluminium
	Mounting	3.2 mm diameter holes (4x)
	Weight Without Cable (g)	(1) CG/104, CO/223 - (2) CG/64, CO/137

(1) Stainless Steel Casing AISI316 Grade (e.g. for offshore/marine environment)

(2) Aluminum (MIL-A-8625 Type II coating)

All characteristics are subject to modification if product evolution


ELECTRICAL CONNECTIONS - Cable Gland Model

Signal X sensing	Signal Y sensing	Signal Z sensing	5 x 0,25 ²
Sensor supply + input	Sensor supply + input	Sensor supply + input	Brown
Sensor supply - input	Sensor supply - input	Sensor supply - input	White
X Axis Out			Yellow
	Y Axis Out		Grey
		Z Axis Out	Green

ELECTRICAL CONNECTIONS - M12 Connector Model

I 03		1	OUT X	4-20mA current output
		2	OUT Y	4-20mA current output
		3	OUT Z	4-20mA current output
		4	+24VDC	Sensor supply + input
		5	0VDC	Sensor supply - input

ELECTRICAL CONNECTIONS

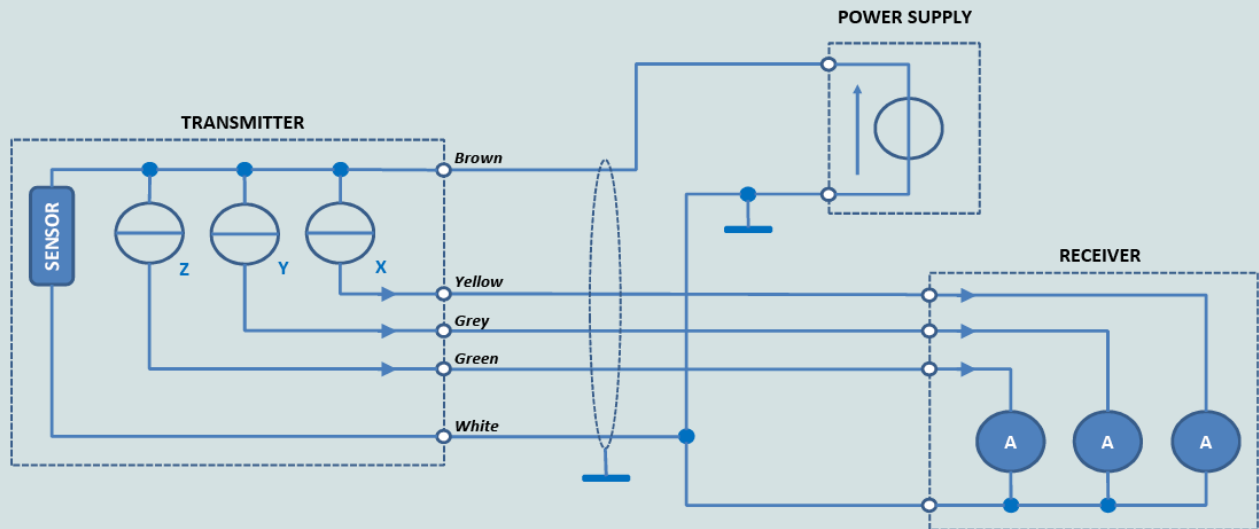

ORDERING INFORMATION

IAC - MR	-	I	-	03	-	XX	-	XX	-	Xg	-	XXXXHz	-	X	-	XX.X m		
		Cable Connection				Casing				Range		Low Pass Filter Frequencies		Low Pass Filter Orders		Cable Length		
		CG	Cable Gland			AL	Aluminium			± 2g	0100		100Hz		1	1st order	Value in meter	
		CO	M12			SS	Stainless Steel			± 4g	0250		250Hz		2	2nd order		
										± 8g	0500		500Hz					
											1000		1000Hz					