


N.b. ROD-EYE ORIENTATION NOT GUARANTEED.

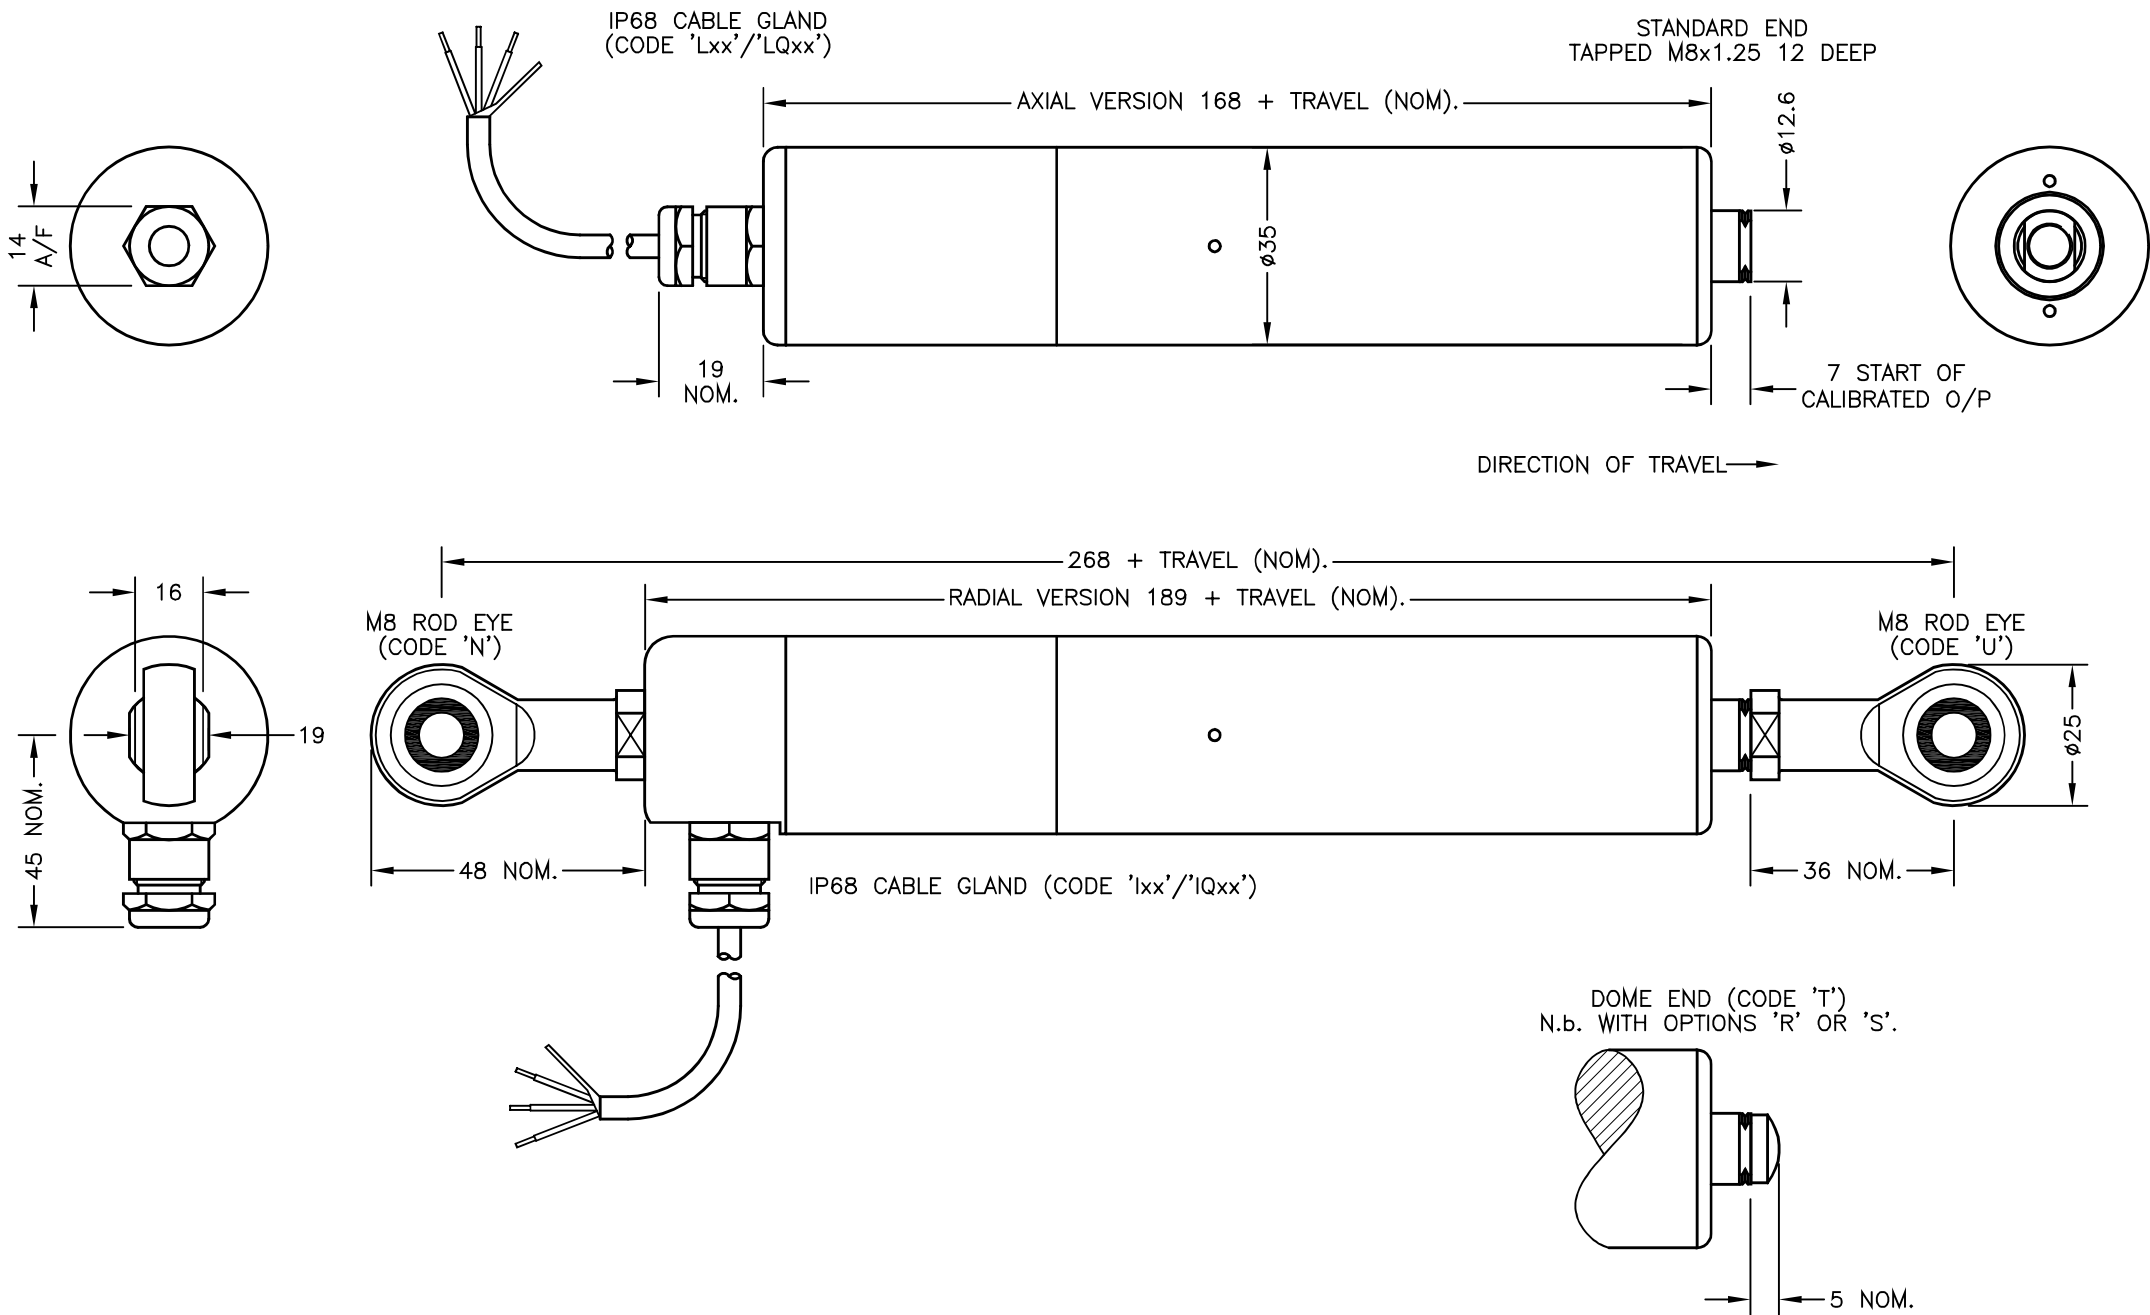

ELECTRICAL OPTIONS/ SPECIFICATIONS

OUTPUT SUPPLY

0.5 TO 4.5V RATIOMETRIC 5V
SUPPLY CURRENT 12mA TYP. 20mA MAX.

CABLE: 0.2mm², O/A SCREEN, PUR JACKET – SUPPLIED WITH 50cm OR REQUIRED LENGTH IN cm (15000cm MAX).
STANDARD 3-CORE: JACKET $\phi 4$ mm BLACK e.g. 'L50'
OPTIONAL 5-CORE: JACKET $\phi 4.6$ mm BLUE e.g. 'LQ50'

CONNECTIONS;

3 CORE	5 CORE	
RED	RED	+Ve
–	ORG	+SENSE (5-WIRE ONLY)
BLACK	BLACK	0V
–	GRY	–SENSE (5-WIRE ONLY)
WHITE	WHITE	OUTPUT
SCREEN	SCREEN	BODY


RANGE OF DISPLACEMENT FROM 0–5mm TO 0–800mm e.g.76, IN INCREMENTS OF 1mm.

BODY MATERIAL: STAINLESS STEEL 316.

FURTHER OPTIONS:

SINGLE PAIR OF BODY CLAMPS 'P'
TWO PAIRS OF BODY CLAMPS 'P2'
SPRING RETURN PUSH-ROD, TRAVEL ≤ 300 mm
RETURN TO EXTENDED POSITION (CODE 'R')
RETURN TO RETRACTED POSITION (CODE 'S')

PUSH-ROD FREE (CODE 'V') – NOT AVAILABLE WITH SPRUNG OPTIONS.

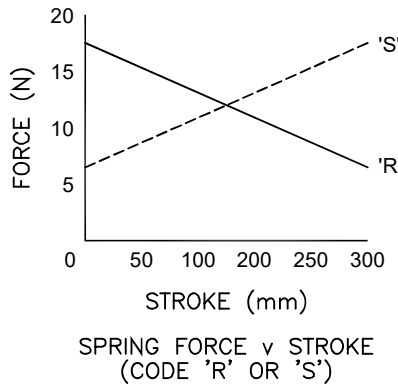

NOTE:– READ INSTALLATION SHEET E115–19 FOR FULL INSTRUCTIONS FOR USE.

ATEX / IECEx APPROVED TO
 II 1GD
Ex ia IIC T4 Ga (Ta= –40° to +80°C)
Ex ia IIIC T135°C Da (Ta= –40° to +80°C)
Ui 11.4V, li 0.2A, Pi 0.51W

APPROVED FOR USE IN CONJUNCTION WITH A GALVANICALLY ISOLATED BARRIER.

NOTE: APPROVAL ONLY APPLIES AT NORMAL ATMOSPHERIC PRESSURE!

MAXIMUM WORKING DEPTH: 100 METRES/328 FEET. WHERE THE FREE END OF THE CABLE IS TO BE TERMINATED IN A SUBMERGED POSITION, ADEQUATE SEALING MUST BE PROVIDED TO PROTECT CONNECTIONS.

THE PUSH-ROD RETRACTS A FURTHER 4mm NOM. FROM START OF CALIBRATED TRAVEL. STANDARD VERSIONS THE PUSH-ROD EXTENDS A FURTHER 8mm NOM. FROM END OF CALIBRATED TRAVEL, FOR SPRUNG VERSIONS: 'R': 1mm, 'S': 2mm. 'V' CODED PUSH-ROD WILL DEPART SENSOR BODY.

A	FIRST ISSUE	PDM
B	RANGE WAS 50-600mm RAN1056	RDS
C	OPTION 'S' ADDED ~ RAN1108	PDM
D	5-CORE OPTION ADDED ~ RAN1102	PDM
E	RANGE NOTE AMENDED ~ RAN1200	PDM



DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE. CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED BY THE AUTHORISED PERSON
THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.

DSPM Industria
sensori & trasduttori

Via Paolo Uccello 4 - 20148 Milano
Tel +39 02 48 009 757 Fax +39 02 48 002 070 info@dspmindustria.it www.dspmindustria.it

POSITEK

LIMITED

A	16/10/15		CHECKED BY RDS	X	±0.4
B	09/11/15			X.X	±0.2
C	14/09/16			X.XX	±0.1
				DIMS	mm
D	13/04/17	DESCRIPTION INTRINSICALLY SAFE RUGGED SUBMERSIBLE STAND-ALONE LINEAR POSITION SENSOR			
E	06/09/17				
SCALE 12.5mm 		DRAWING NUMBER E115-11			
				REV	E
		SHEET 1 OF 1			