


FUTEK MODEL QLA383-TPS

Low Profile Portable Calibration Tripod

ITEM NUMBER: TPS01020

INCH [mm] | R.O.= Rated Output

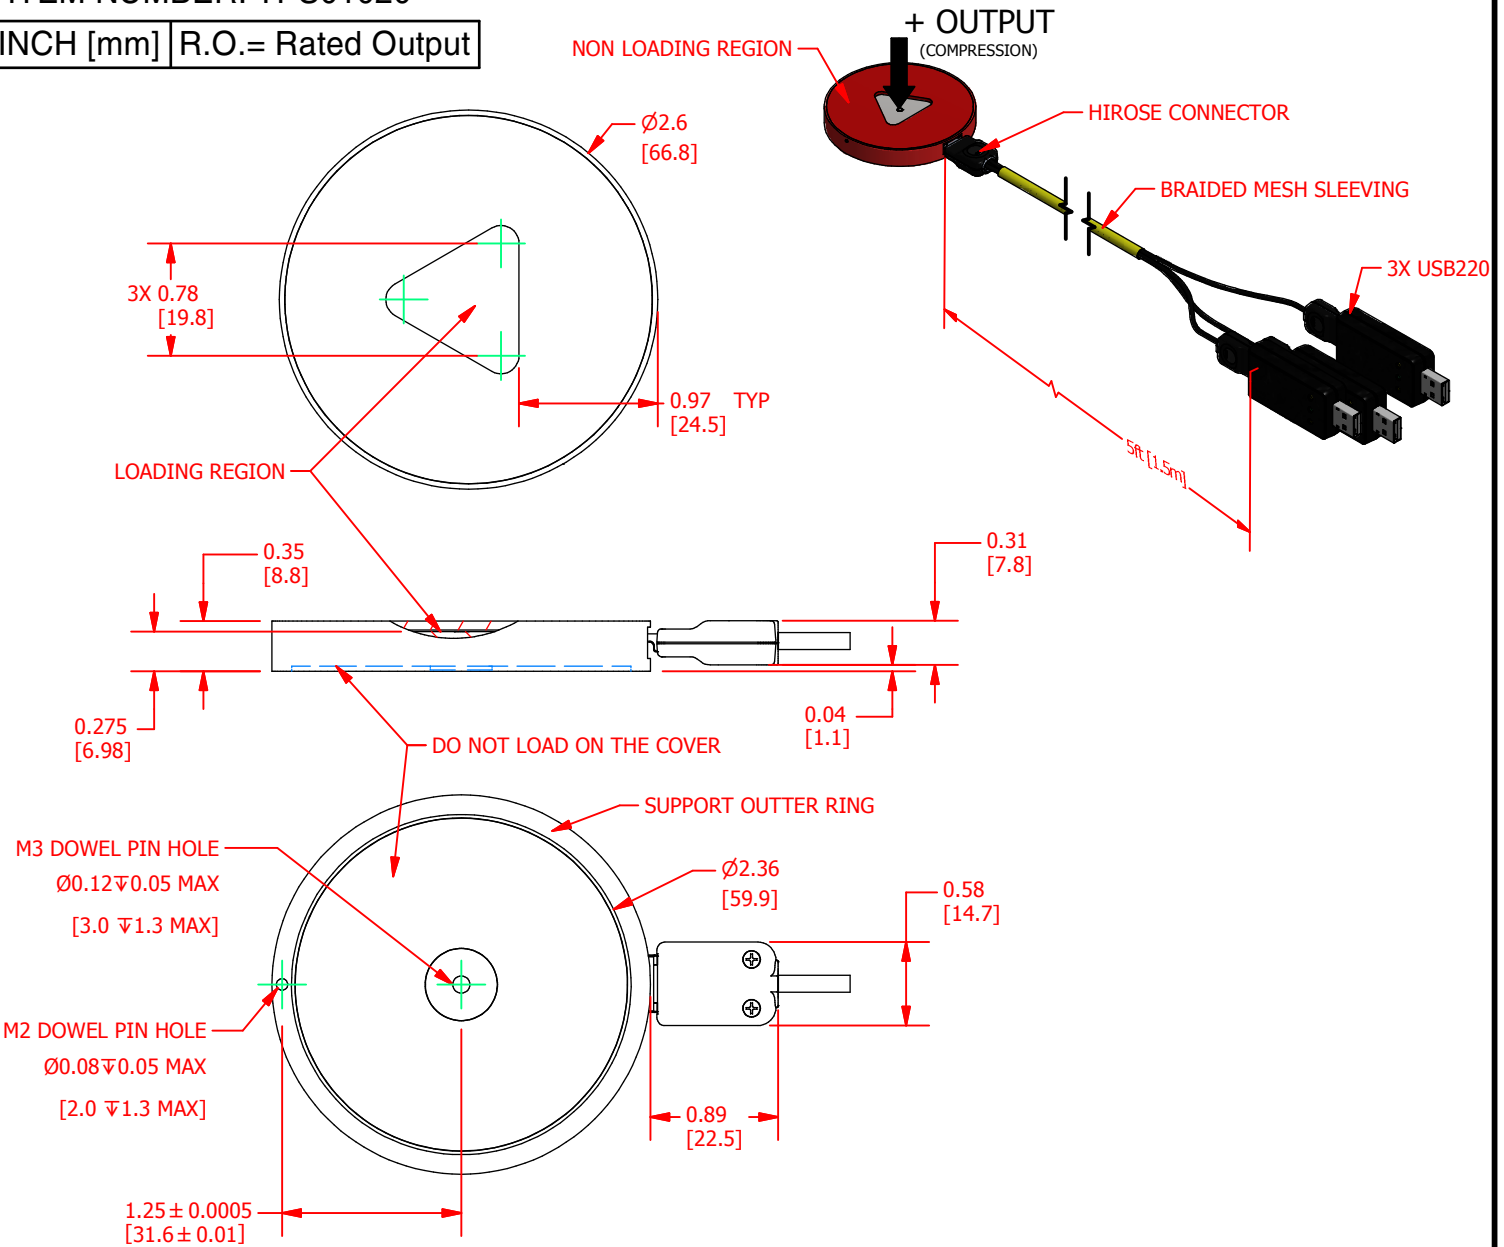

SPECIFICATIONS:

OUTPUT	USB2.0
CAPACITY	1000 g
RESOLUTION	0.01 g
MAXIMUM LOAD	2000 g
WEIGHT (approx)	90 g
MATERIAL	Aluminum

CABLE: 3x 29 AWG Spiral Shielded Silicone, 5 ft [1.5 m] Long

DSPM Industria[®]
sensori & trasduttori

Tel +39 02 48 009 757 Fax +39 02 48 002 070 info@dspmindustria.it www.dspmindustria.it

Via Paolo Uccello 4 - 20148 Milano

CUSTOMER APPROVAL- COMPANY:	<h1>OUTLINE DRAWING</h1>	<p>This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:</p> <p>FUTEK ADVANCED SENSOR TECHNOLOGY, INC.</p>
CUSTOMER APPROVAL- NAME / DATE:		
REVISIONS: (Refer to dwg # revision sheet)	<p>STANDARD NOTES: (Unless Otherwise Specified)</p> <p>ALL DIMENSIONS ARE IN INCHES</p> <p>DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M</p> <p>REMOVE BURRS AND BREAK SHARP EDGES .005 - .015</p> <p>THREADS PER HANDBOOK H-28</p> <p>DIMENSIONS ARE SHOWN AFTER PLATING</p> <p>3rd ANGLE PROJ.</p> <p>ANGLE: ± 1/2°</p> <p>CHAMFER: ± 5°</p> <p>TOLERANCE: .X ± 0.1" .XX ± 0.01" .XXX ± 0.005"</p>	<p>MODEL: QLA383-TPS DWG No.: FO1385</p> <p>DRAWN BY: M. Lisiak CREATED DATE: 2/2/2015</p> <p>APPROVED BY: J. Vargas APPROVED DATE: 2/2/2015</p> <p>CHECKED BY: E. Pano CAGE: 1X8M6 SHEET: 1 OF 1</p>